




QUICK START GUIDE

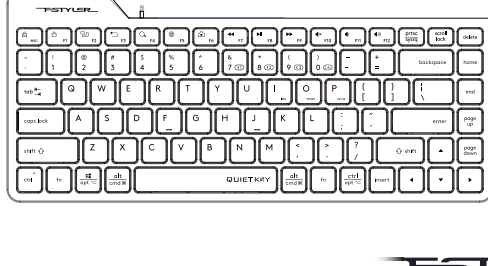

WHAT'S IN THE BOX

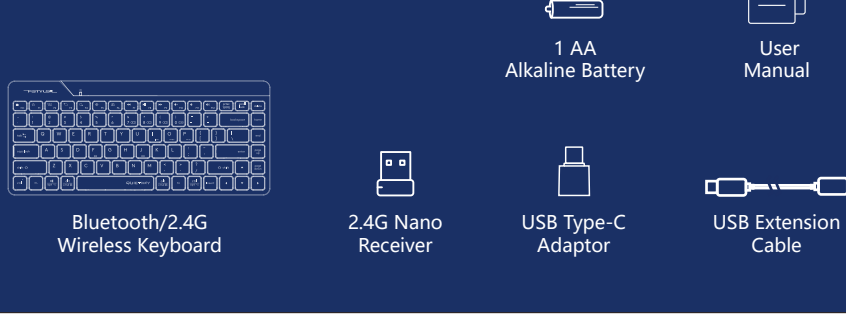

THE FRONT

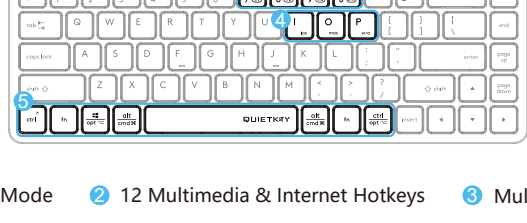


- 1 FN Locking Mode
- 2 12 Multimedia & Internet Hotkeys
- 3 Multi-Device Switch
- 4 Operating System Swap
- 5 PC/MAC Dual-Function Keys

THE BOTTOM




CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)

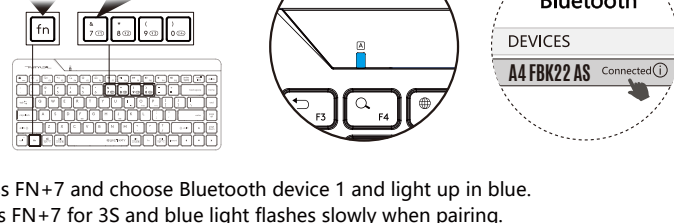


- Short-press FN+7 and choose Bluetooth device 1 and light up in blue. Long-press FN+7 for 3S and blue light flashes slowly when pairing.
- Choose [A4 FBK22 AS] from your Bluetooth device. The indicator will be solid blue for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)

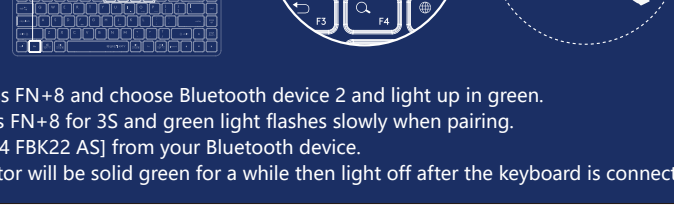

- Short-press FN+8 and choose Bluetooth device 2 and light up in green. Long-press FN+8 for 3S and green light flashes slowly when pairing.
- Choose [A4 FBK22 AS] from your Bluetooth device. The indicator will be solid green for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 3 (For Mobile Phone/Tablet/Laptop)

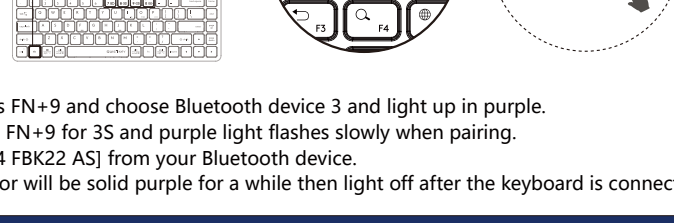

- Short-press FN+9 and choose Bluetooth device 3 and light up in purple. Long-press FN+9 for 3S and purple light flashes slowly when pairing.
- Choose [A4 FBK22 AS] from your Bluetooth device. The indicator will be solid purple for a while then light off after the keyboard is connected.

CONNECTING 2.4G DEVICE



- Plug the receiver into the computer's USB port.
- Use the Type-C adaptor to connect the receiver with the computer's Type-C port.

Turn on the keyboard power switch. Yellow light will be solid (10S). The light will be off after connected.

OPERATING SYSTEM SWAP

Windows / Android is default system layout.

System	Shortcut [Long-Press for 3S]	Device / Layout Indicator
iOS	fn + [ios]	Light will be off after flashing.
Mac	fn + [mac]	
Windows & Android	fn + [w/a]	

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.


INDICATOR (For Mobile Phone/Tablet/Laptop)

Indicator	Yellow Light	Blue Light	Green Light	Purple Light
Multi-Device Switch	fn + [0/ESC]	fn + [7/CB]	fn + [8/CB]	fn + [9/CB]
Device Switch: Short-Press for 1S	Solid Light 5S	Solid Light 5S		
Pair Device: Long-Press for 3S	No Need to Pair	Pairing: Flashes Slowly Connected: Solid Light 10S		

ANTI-SLEEP SETTING MODE

To prevent your PC from entering the sleep-mode setting while you are away from your desk, simply turn on our new Anti-Sleep Setting Mode for PC. It will automatically simulate the cursor movement once you turn it on. Now you may take an hour nap while downloading your favorite movie.

Press both the fn + [tab] buttons for 1s.

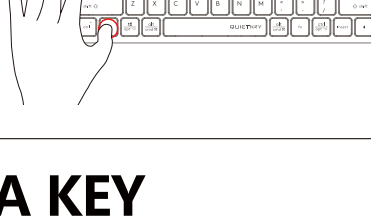

FN MULTIMEDIA KEY COMBINATION SWITCH

FN Mode: You can lock & unlock Fn mode by short pressing FN + ESC by turn.

- 1 Lock Fn Mode: No need to press FN key
- 2 Unlock Fn Mode: FN + ESC

After pairing, FN shortcut is locked in FN mode by default, and the locking FN is memorized when switching and shutting down.



Windows / Android / Mac / iOS

OTHER FN SHORTCUTS SWITCH

Shortcuts	Windows	Android	Mac / iOS
fn + [delete]	Pause	Pause	Pause
fn + [up]	Device Screen Brightness +	Device Screen Brightness +	Device Screen Brightness +
fn + [down]	Device Screen Brightness -	Device Screen Brightness -	Device Screen Brightness -
fn + [backspace]		Screen Lock	Screen Lock (iOS Only)


Note: The final function refer to the actual system.

DUAL-FUNCTION KEY

Multi-System Layout

Keyboard Layout	Windows / Android (W / A)	Mac / iOS (ios&mac)
fn + [ios] [mac] [w/a]	Switching Steps: 1 Choose iOS layout by pressing FN+I. 2 Choose MAC layout by pressing FN+O. 3 Choose Windows / Android layout by pressing FN+P.	
[ctrl]	Ctrl	Control ^
[start]	Start	Option ⌥
[alt]	Alt	Command ⌘
[alt-right]	Alt-Right	Command ⌘
[ctrl-right]	Ctrl-Right	Option ⌥

LOW BATTERY INDICATOR

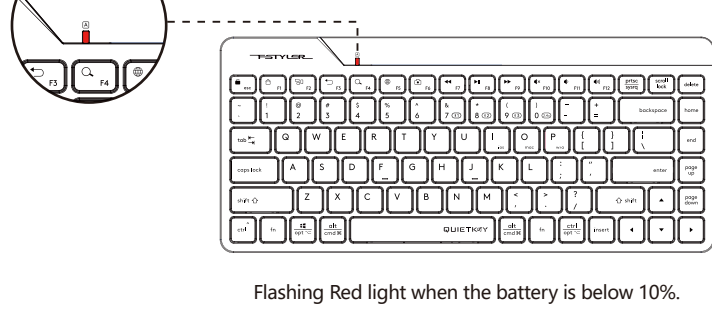

Flashing Red light when the battery is below 10%.

SPECIFICATIONS

Connection: Bluetooth / 2.4GHz
 Multi-Device: Bluetooth x 3, 2.4G x 1
 Operation Range: 5-10 m
 Report Rate: 125 Hz
 Character: Laser Engraving
 Includes: Keyboard, Nano Receiver, 1 AA Alkaline Battery, Type-C Adaptor, USB Extension Cable, User Manual
 System Platform: Windows / Mac / iOS / Chrome / Android / Harmony OS...

Q & A


- Question** How to switch layout under different system?
Answer You can switch layout by pressing Fn + I / O / P under Windows | Android | Mac | iOS.
- Question** Does the layout can be remembered?
Answer The layout you used last time will be remembered.
- Question** How many devices can be connected?
Answer Interchange and connect up to 4 devices at the same time.
- Question** Does the keyboard remember the connected device?
Answer The device you connected last time will be remembered.
- Question** How can I know the current device is connected or not?
Answer When you turn on your device, the device indicator will be solid. (disconnected: 5S, connected: 10S)
- Question** How to switch between connected Bluetooth device 1-3?
Answer By pressing FN + Bluetooth shortcut (7 - 9).

WARNING STATEMENT

- The following actions may damage the product.
- To disassemble, bump, crush, or throw into fire is forbidden for the battery.
- Do not expose under the strong sunlight or high temperature.
- The discard of battery should obey to the local law, if possible please recycle it. Do not dispose it as household garbage, because it may cause an explosion.
- Do not continue to use if severe swelling occurs.
- Please do not charge the battery.



www.a4tech.com



Scan for E-Manual